


BASIC



ROUND LED PANEL

PERFORMANCE

Power: 9W, 12W, 18W, 24W
 Efficacy: 80lm/W
 Beam angle: 110deg
 CCT: 3000K - 6500K
 Ingress Protection: IP44
 Ra: >80
 Power Factor: >0.5
 Light weight construction for quick and easy installation
 Warranty: 5 years limited
 Operating Temperature: 0°C ~ +40°C

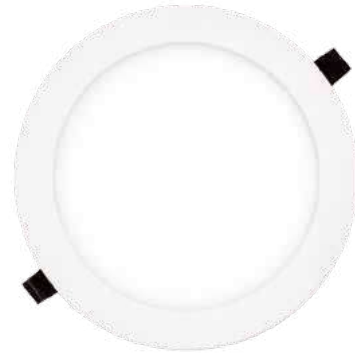

DIMENSION DRAWING

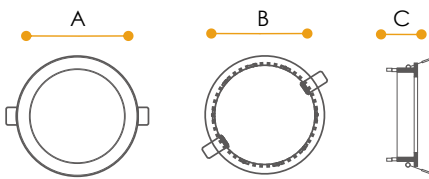

Wattage	Outer Dia (A)	Cutout (B)	Height (H)
9W	Ø146mm	Ø136mm	20mm
12W	Ø170mm	Ø160mm	20mm
18W	Ø240mm	Ø225mm	20mm
24W	Ø300mm	Ø282mm	20mm

SPECIFICATIONS

LED Type	Epistar
Power Supply	Osram/Philips/TUV
Driver Type	ON-OFF/1-10V/DALI
Lumens	720lm to 1920lm
Input Voltage	220-240VAC, 50/60Hz
Material	Extruded aluminum
Finish	Powder Coated White RAL9016
Back Plate	Stamping Steel
Diffuser	PS
Spring	Steel
Connection	DC Connector

PRODUCT PARAMETER

Model Number	Power Wattage	Beam Angle	CCT	Lumens	Controls
BASIC-RP	9: 9W	110°	3: 3000k	80lm/W	Non-dimmable
	12: 12W		4: 4000k		1-10V dimming
	18: 18W		5: 5000k		DALI dimming
	24: 24W		6: 6500K		Occupancy Sensor